

Technical datasheet

Description

Article Number

281743

Type description **REV-9POL/12-7,5kW B/G, 16A, IP66, 1NC, switch 0/1+mounting kit, black/grey**

Switching diagram

On-off switch

10 switching contacts

9-pole + 1NC

Switching angle: 90°

Lettering O OFF - I ON

Electrical Data

Rated uninterrupted current I_{the}

25 A

Rated operational current I_e AC-21A

25 A

Rated operational voltage U_e

690 V

Making/breaking capacity of AC-23A 400V

7.5 kW

Making/breaking capacity of AC-3 400V

5.5 kW

Isolating characteristic up to
Volt ~

500

Single phase motor 230V

2.2 kW

Single phase motor 400V

3 kW

Terminal cross section

- solid or multi-stranded


min./max.

1.0 - 4.0 mm²

- finely stranded with ferrule

min./max.

1.0 - 2.5 mm²

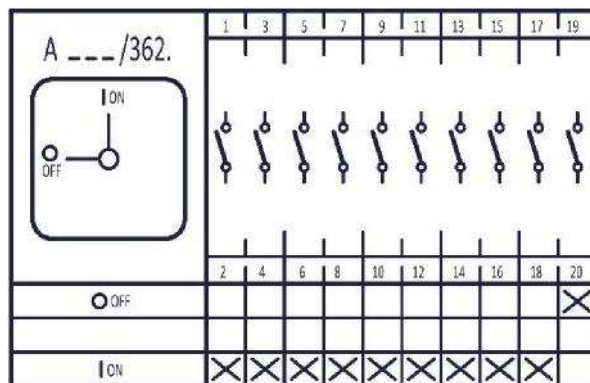

Application

Insulated enclosure I2H1551 UV and weather resistant

Lockout handle for 3 padlocks lockable in O-position

Handle/enclosure

black/grey


Degree of protection

IP66



Dimensions (mm)

Dimensions (mm)					Knock-out	
A	C	D	E	G	H1	H2
115	125	29	100	Ø6.3	M25	M20

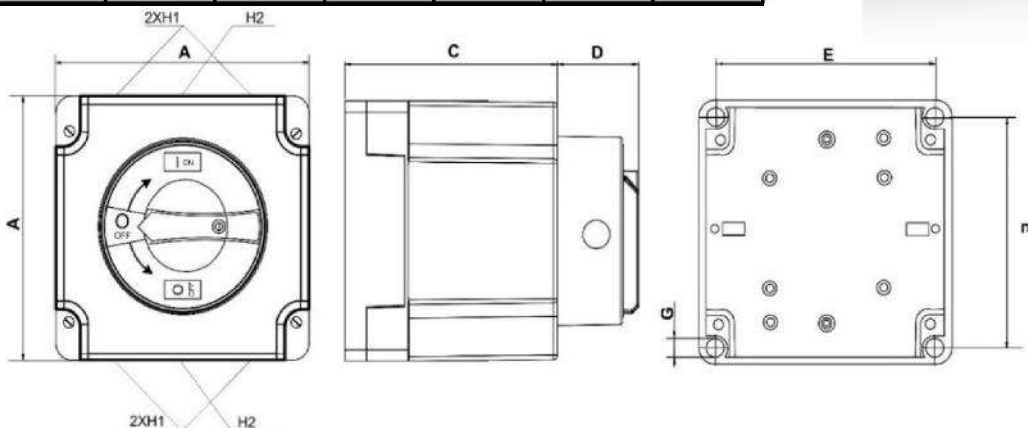

Subject to change without notice, errors and errata expected.