

## Technical datasheet

### Description

Article Number

35757

Type description

REV-5POL/05-7,5kW R/Y, 10A, IP66, 1NC, switch 0/1+mounting kit, red/ yellow

### Switching diagram

Emergency-off switch

6 switching contacts

5-pole + 1NC

Switching angle: 90°

Lettering O OFF - I ON

### Electrical Data Switch

Rated uninterrupted current  $I_{the}$

25 A

Rated operational current  $I_e$  AC-21A

25 A

Rated operational voltage  $U_e$

690 V

Making/breaking capacity of AC-23A 400V

7.5 kW

Making/breaking capacity of AC-3 400V

5.5 kW

Isolating characteristic up to

500 Volt ~

Single phase motor 230V

2.2 kW

Single phase motor 400V

3 kW

Terminal cross section

- solid or multi-stranded min./max. 1.0 - 4.0 mm<sup>2</sup>

- finely stranded with ferrule min./max. 1.0 - 2.5 mm<sup>2</sup>

### Application

Insulated enclosure I1N1550 UV and weather resistant


Lockout handle for 3 padlocks lockable in O-position

Handle/enclosure

red/yellow

Degree of protection

IP66

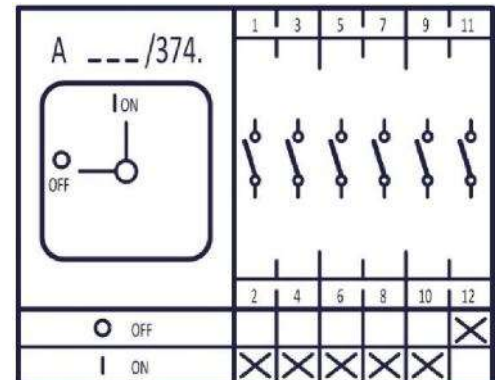

### Dimensions (mm)

					Knock-out		Drilled
A	C	D	E	G	H1	H2	H3
90.5	73	29	80	Ø5.5	M20	M12	M20

