

# CAP-C

## Multi-Nozzle Diffuser

Data Sheet



# Table of Contents

Description . . . . .	3
Design . . . . .	4
Product Parts . . . . .	4
Setup Possibilities . . . . .	5
Dimensions . . . . .	6
Ordering Code . . . . .	7
Quick Selection . . . . .	7
Technical Parameters . . . . .	8
Installation, Maintenance & Operation . . . . .	13
Transport & Storage . . . . .	13
Supplement . . . . .	13
Related Product . . . . .	13



## Description

CAP-C is a multi-nozzle diffuser with a plenum box, mainly intended for air supply in comfort ventilation systems for offices, shops, medical rooms, school classrooms, etc., installed in open space under the ceiling.

### Highlights

- Versatile adjustability of air discharge patterns
- Excellent air induction and mixing even with small air flow volumes, fit for VAV ventilation
- High air flow capacity with low noise and moderate pressure drop
- Compact design with adjustment damper and flow measurement probes for supply and extract

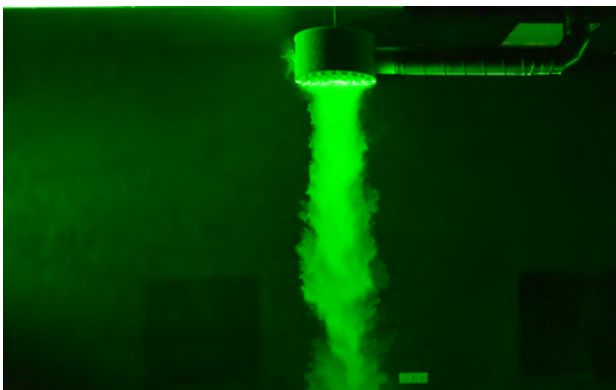


Fig. 1: Air flow visualisation (left: vertical discharge pattern; right: horizontal discharge pattern)

# Design

The CAP-C body is made from galvanized steel, composed of the plenum box with a sideways oriented rubber gasket sealed circular connection and diffuser plate with polymer nozzles, attached by permanent magnets. The nozzles can be rotated by 360° in the plane of the diffuser plate. The proper directional adjustment of the individual nozzles results in the desired air discharge pattern. The connection spigot is equipped with an air flow adjustment damper and the air flow measurement probe tapings for air supply and extract. All these parts are accessible from outside, so measurement and adjustment require no dismantling of the diffuser. For the installation of the diffuser, there is a thread nut in the upper part of the plenum box. It is fit for fixing on the suspended thread bar.

## Product Parts

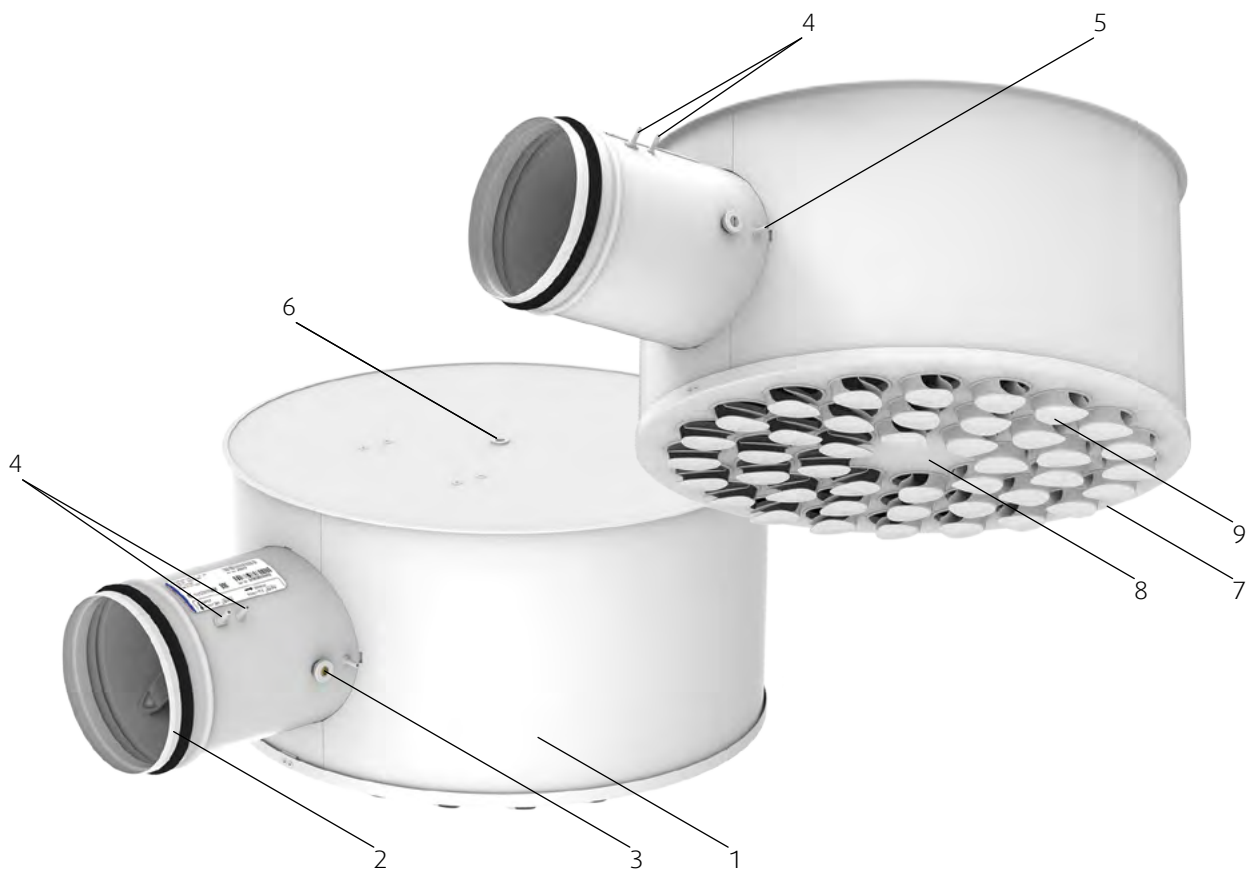


Fig. 2: Components of CAP-C

### Legend

1	Plenum box
2	Connection with rubber gasket
3	Damper (adjustable from outside)
4	Supply air measurement tapping
5	Extract air measurement tapping
6	Nut M8 for fixing on thread bar
7	Magnets to hold diffuser plate
8	Diffuser plate
9	Nozzles

## Setup Possibilities

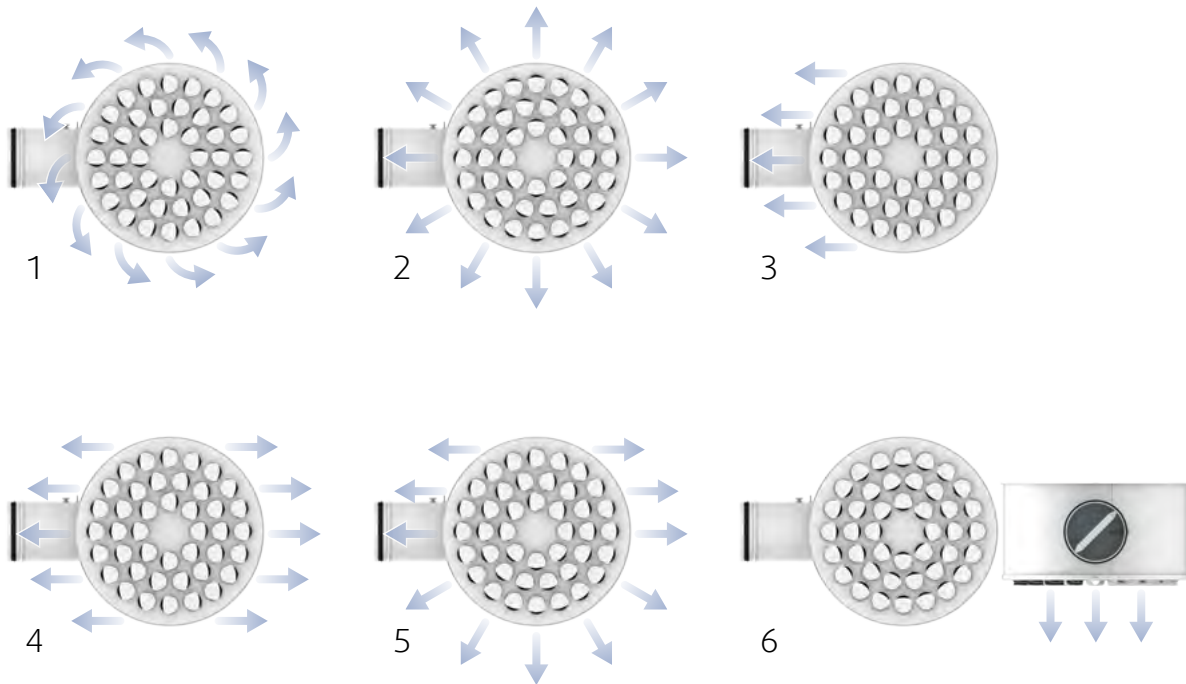


Fig. 3: Different deflector setup and resulting air discharge patterns

### Legend

1	Tangential horizontal swirl discharge
2	Radial horizontal omnidirectional discharge
3	Horizontal discharge, single direction
4	Horizontal discharge, 2 directions
5	Horizontal discharge, 3 directions
6	Vertical discharge

# Dimensions

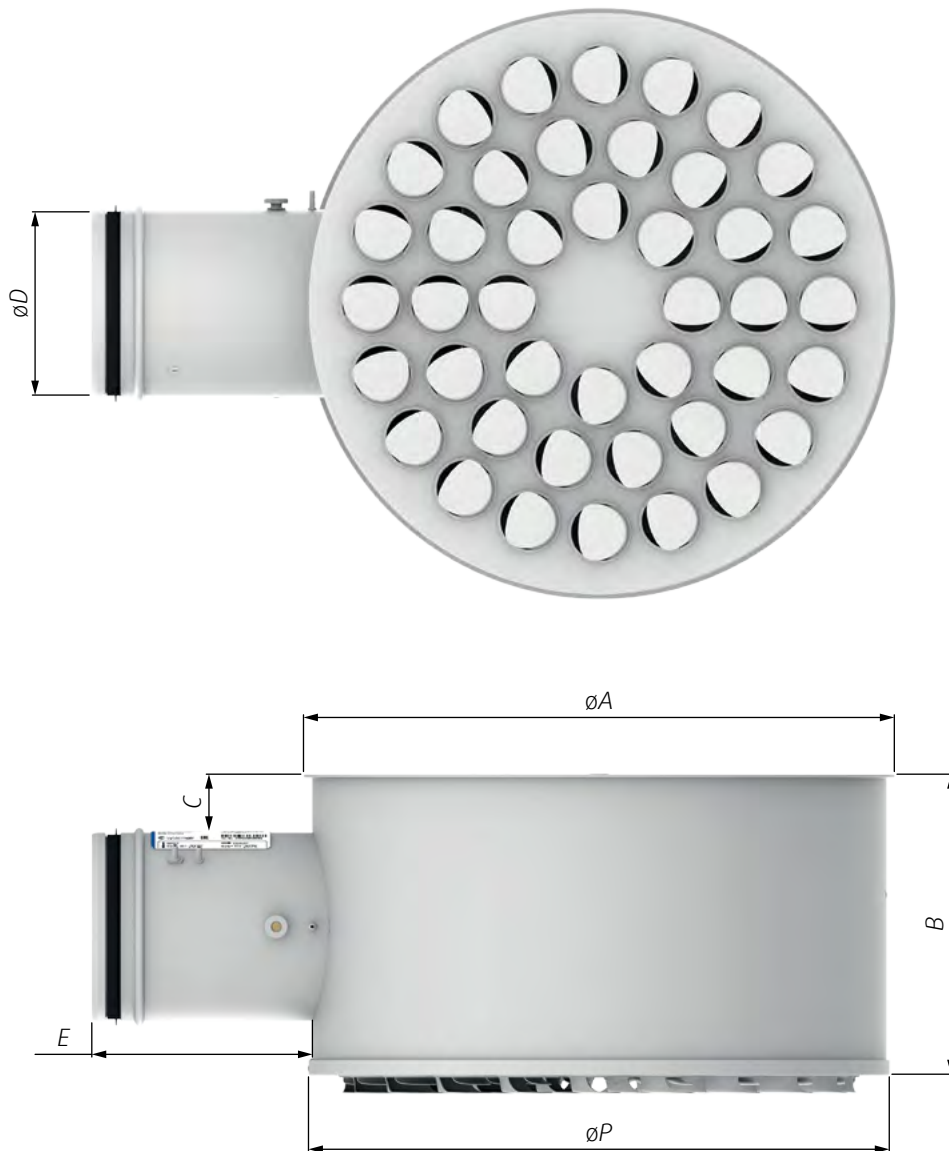


Fig. 4: Dimensions of CAP-C

Tab. 1: Dimensions of CAP-C

Type	$\varnothing D$	$\varnothing A$	$\varnothing P$	$B$	$C$	$E$	$m$
	mm						kg
CAP-C-100	98	324	314	172	39	155	3,0
CAP-C-125	123	408	398	202	41	165	4,4
CAP-C-160	158	497	487	252	49	185	6,8
CAP-C-200	198	597	587	287	46	210	9,2
CAP-C-250	248	608	598	332	44	235	10,6
CAP-C-315	313	632	622	422	56	265	13,3
CAP-C-400	398	634	624	508	56	285	15,7

# Ordering Code

Size - inlet $\varnothing$ (mm)		CAP-C-	<input type="checkbox"/>	<input type="checkbox"/>
			100	
			125	
			160	
			200	
			250	
			315	
		400		
Surface finish <sup>1)</sup>	RAL9003 signal white	SW		
	RAL9010 white	W		
	Other RAL colour	RALXXXX		

NOTE: 1) If no colour is stated in the ordering code, the diffuser will be delivered in the RAL 9003 signal white colour.

## Example of the Ordering Code

CAP-C-200-SW




Diffuser of size 200 mm, signal white colour.

# Quick Selection

Type	Air flow volume $q$ and pressure drop $\Delta P$ at different sound power levels $L_{WA}$					
	25 dB		30 dB		35 dB	
	$m^3/h$	l/s	$m^3/h$	l/s	$m^3/h$	l/s
CAP-C-100	104	29	131	36	157	44
CAP-C-125	165	46	198	55	238	66
CAP-C-160	264	73	317	88	380	106
CAP-C-200	385	107	471	131	562	156
CAP-C-250	553	154	676	188	809	225
CAP-C-315	766	213	914	254	1093	304
CAP-C-400	796	221	968	269	1151	320

# Technical Parameters

## Legend

$p_s$	Pa	Pressure drop
$q_v$	m <sup>3</sup> /h, l/s	Air flow volume
$L_{WA}$	dB(A)	A-weighted total sound power level
$\Delta T$	K	Temperature difference Supply air - Room air
$L_{0,2}$	m	Air throw length with terminal velocity 0,2 m/s
$L_x$	m	Air throw length calculated for specific terminal velocity
$x$	m/s	Terminal velocity in range of 0,1 m/s ... 1 m/s
 0%, 25%, 50%, 75%, 100%	The plenum box damper positions in pressure drop/noise diagrams are represented as a percentage.  0% is a fully closed damper.  100% is a fully open damper.	

## Calculation of Air Throw for Different Terminal Velocities

$$L_x = L_{0,2} \times 0,2/x$$

## Correction Tables

NOTE: For vertical distribution see Systemair DESIGN.

Tab. 2: Correction factors for horizontal distribution

$\Delta T = -10 \text{ K}$	$\Delta T = 10 \text{ K}$
0,75	0,83

e.g.:  $L_{(\Delta T = 10 \text{ K})} = L_{(\Delta T = 0 \text{ K})} \times 0,83$

Tab. 3: Correction factors for horizontal distribution - alternative nozzle settings

4 way	3 way	2 way	1 way
1,40	1,90	2,30	3,30

e.g. for 3 way horizontal diffusion:  $L_{0,2 (3 \text{ way})} = L_{0,2 (radial)} \times 1,9$



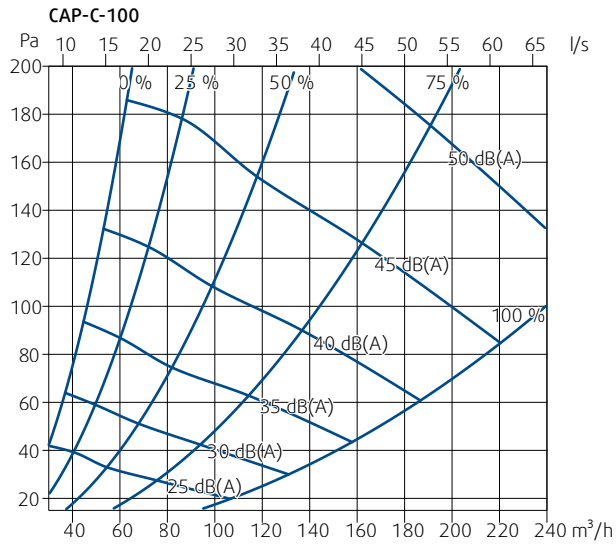


Diagram 1: Pressure drop & A-weighted total sound power level, depending on air flow volume

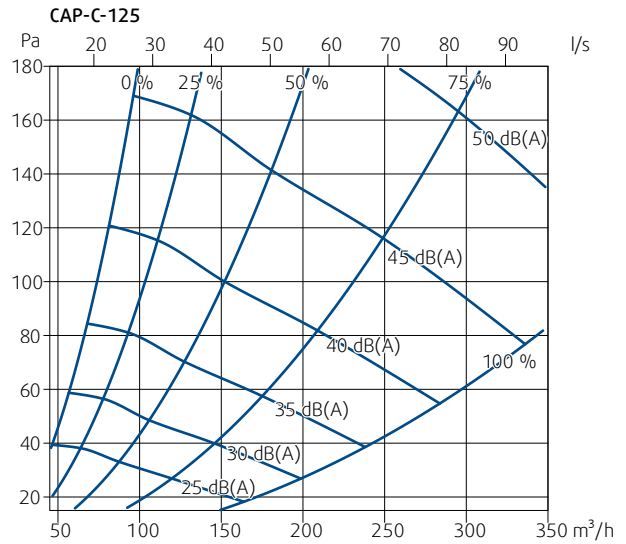


Diagram 3: Pressure drop & A-weighted total sound power level, depending on air flow volume

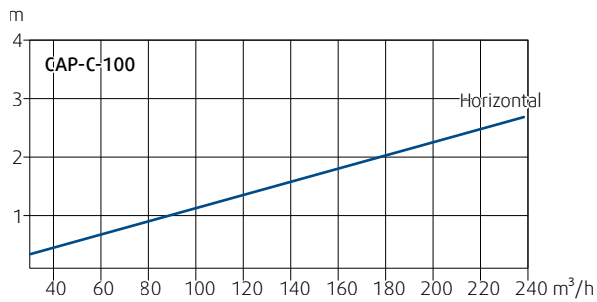


Diagram 2: Isothermal air throw lengths for horizontal radial discharge with terminal velocity 0,2 m/s, depending on air flow volume

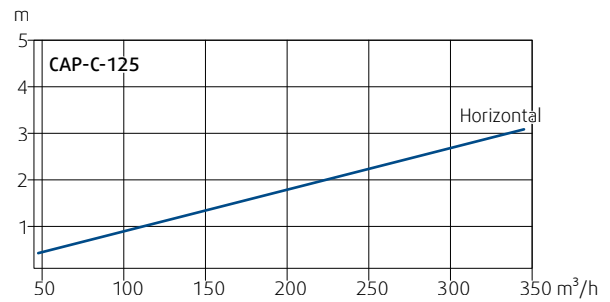


Diagram 4: Isothermal air throw lengths for horizontal radial discharge with terminal velocity 0,2 m/s, depending on air flow volume

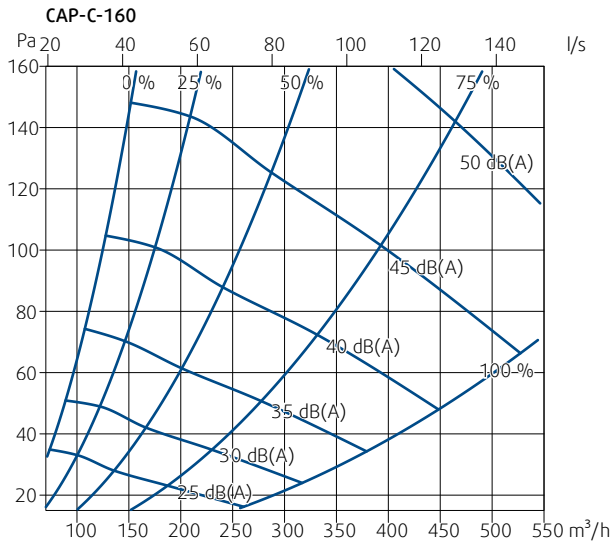


Diagram 5: Pressure drop & A-weighted total sound power level, depending on air flow volume

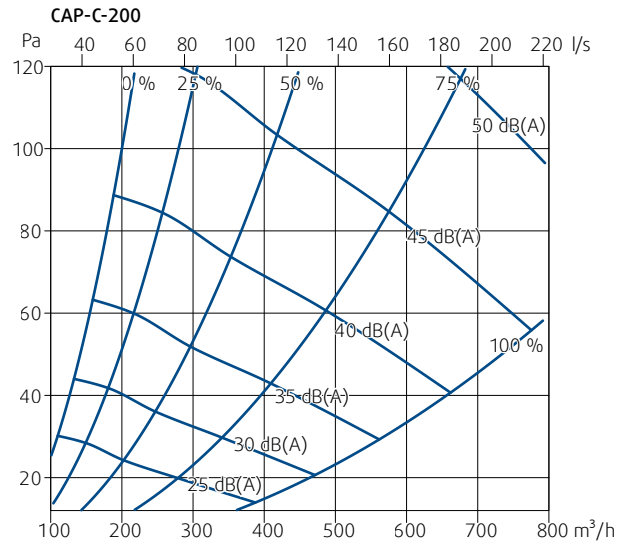


Diagram 7: Pressure drop & A-weighted total sound power level, depending on air flow volume

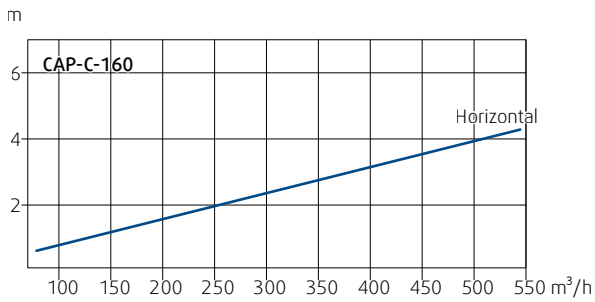


Diagram 6: Isothermal air throw lengths for horizontal radial discharge with terminal velocity 0,2 m/s, depending on air flow volume

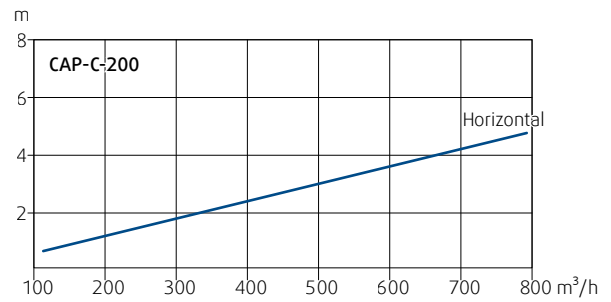


Diagram 8: Isothermal air throw lengths for horizontal radial discharge with terminal velocity 0,2 m/s, depending on air flow volume

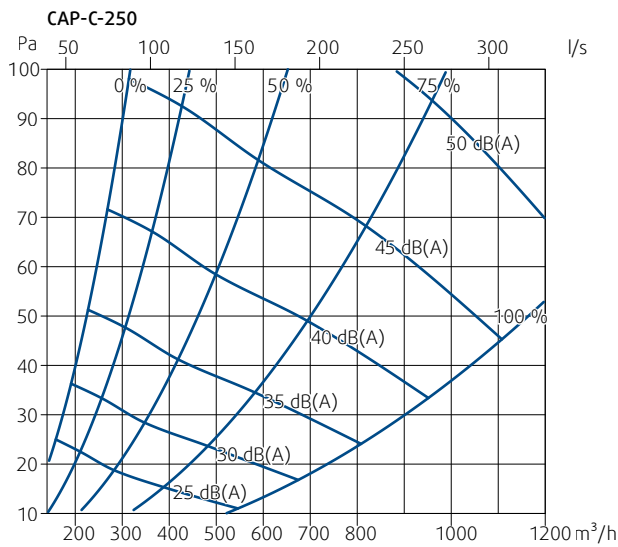


Diagram 9: Pressure drop & A-weighted total sound power level, depending on air flow volume

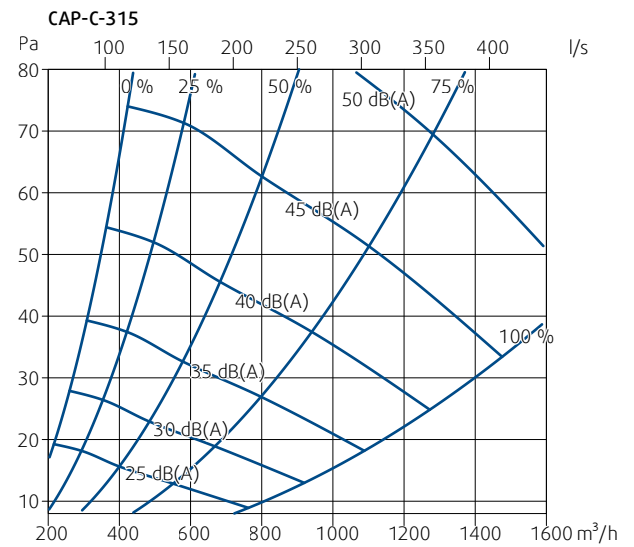


Diagram 11: Pressure drop & A-weighted total sound power level, depending on air flow volume

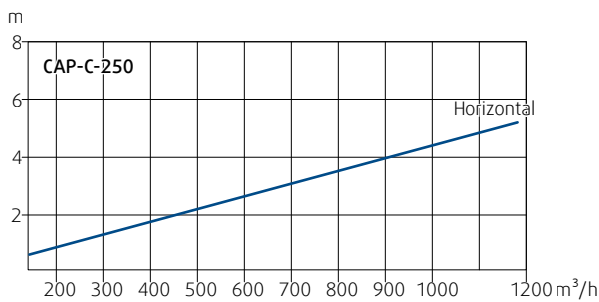


Diagram 10: Isothermal air throw lengths for horizontal radial discharge with terminal velocity 0,2 m/s, depending on air flow volume

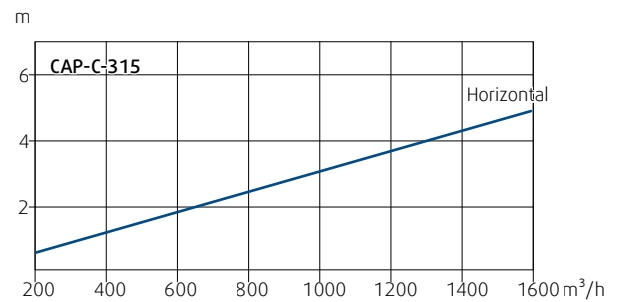


Diagram 12: Isothermal air throw lengths for horizontal radial discharge with terminal velocity 0,2 m/s, depending on air flow volume

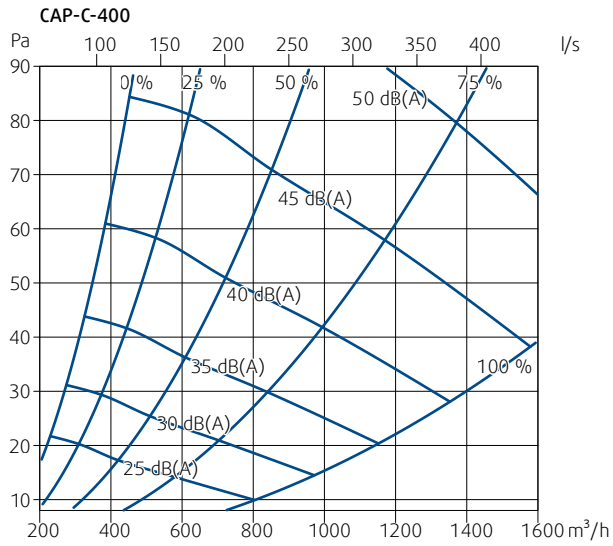


Diagram 13: Pressure drop & A-weighted total sound power level, depending on air flow volume

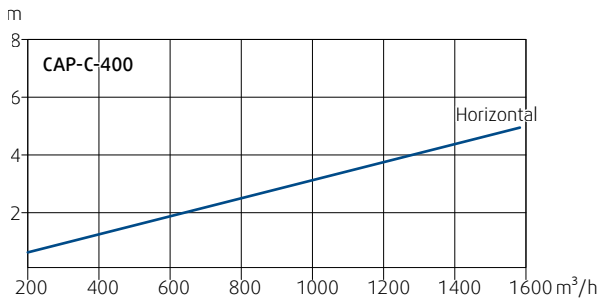


Diagram 14: Isothermal air throw lengths for horizontal radial discharge with terminal velocity 0,2 m/s, depending on air flow volume

# Installation, Maintenance & Operation

Information about installation, maintenance and operation is available in the ["UserManual\\_CAP-C"](#) document or follow the instruction for nozzle diffusers on [Systemair DESIGN](#).

## Transport & Storage

Dry indoor conditions with a temperature range of -40°C to +50°C.

## Supplement

Any deviations from the technical specifications contained herein and the terms should be discussed with the manufacturer. We reserve the right to make any changes to the product without prior notice, provided that these changes do not affect the quality of the product and the required parameters.

Current information on all products is available at [www.systemair.com](http://www.systemair.com)

## Related Product

### CAP-CT

Multi-Nozzle Diffuser

Product information is available within the technical documentation ["DataSheet\\_CAP-CT"](#) and at [www.systemair.com](http://www.systemair.com)



