

Technical datasheet

Description

Article Number 33981

Type description

REV-9POL/12-7,5kW R/Y, 16A, IP66, 1NC, switch 0/1

+mounting kit, red/ yellow

Switching diagram

Emergency-off switch

10 switching contacts

9-pole + 1NC

Switching angle: 90°

Lettering O OFF - I ON

Electrical Data Switch

Rated uninterrupted current I_{the} 25 A

Rated operational current I_e AC-21A 25 A

Rated operational voltage U_e 690 V

Making/breaking capacity of AC-23A 400V 7.5 kW

Making/breaking capacity of AC-3 400V 5.5 kW


Isolating characteristic up to Volt ~ 500

Single phase motor 230V 2.2 kW

Single phase motor 400V 3 kW

Terminal cross section

- solid or multi-stranded min./max. 1.0 - 4.0 mm²
- finely stranded with ferrule min./max. 1.0 - 2.5 mm²

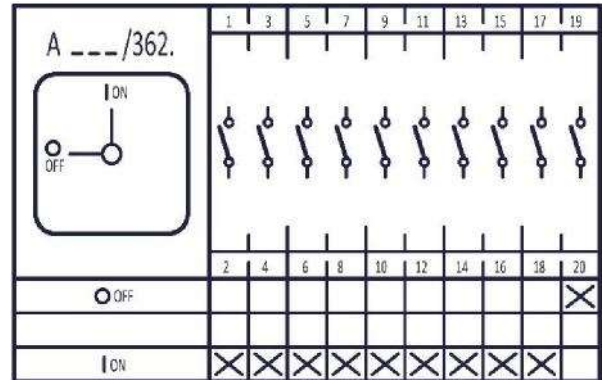

Application

Insulated enclosure I2H1550 UV and weather resistant

Lockout handle for 3 padlocks lockable in O-position

Handle/enclosure red/yellow

Degree of protection IP66



Dimensions (mm)

Dimensions (mm)					Knock-out	
A	C	D	E	G	H1	H2
115	125	29	100	Ø6.3	M25	M20

